

## Product Features

LED wall grazer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall grazer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



## PHYSICAL


Body	Extruded Aluminium
Dimensions	W40*H25*L1000mm
Finish	Powder Coating
IP Rating	IP65

## OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°
Color Temp.	Single Color
LED Chip	CREE   OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

## ELECTRICAL

Power	18*1W
Controller	On/Off
Input voltage	DC24V
Lamp life	50,000 h
Ambient Temp.	-25° C ~ 50° C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

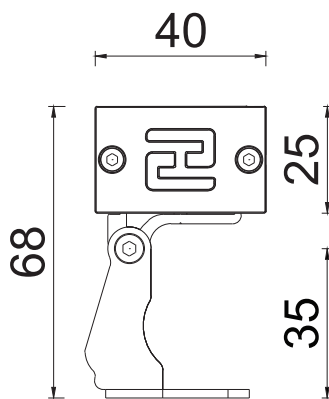

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W01724WX	24*1W	DC24V/AC220V	Single Color	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	On/Off
HD-W01730WX	36*1W	DC24V/AC220V	Single Color	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	On/Off
HD-W01718R3	24*1W(3in1)	DC24V	RGB	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	DMX
HD-W01724R3	24*1.5W(4in1)	DC24V	RGBW	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	DMX
HD-W01718R4	24*2W(3in1)	DC24V	RGB	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	DMX
HD-W01724R4	24*3W(4in1)	DC24V	RGBW	8°/10°/15°/45°/60°/80° / 10°30°/20°45°/15°65°/15°45°	DMX