

# Surface Mount Wall Grazer: HD-W02036WX

## Product Features

LED wall grazer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall grazer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



## PHYSICAL



Body	Extruded Aluminium
Dimensions	W52*H109*L1000mm
Finish	Powdear Coating
IP Rating	IP67

## OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	8°/10°/15°/45°/60°/80°/ 10°*30°/20°*45°/15°*65°/15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	CREE   OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

## ELECTRICAL

Power	24W   36W   60W  72W
Controller	Switch   Dali   DMX
Input voltage	220V -240V ( Mono )   24V ( RGB, RGBW)
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

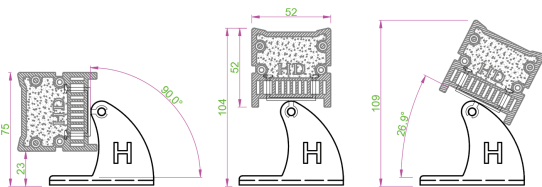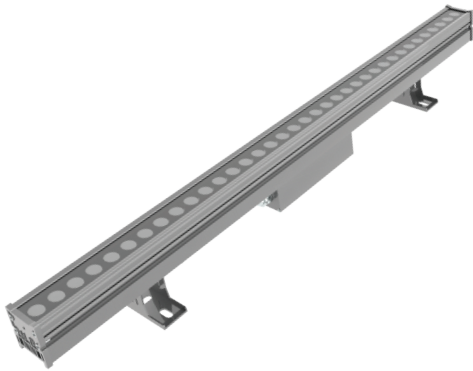

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W02036WX	36W	110V - 240V (Integral)	Mono Color	8°/10°/15°/45°/60°/80° / 10°*30°/20°*45°/15°*65°/15°*45°	On/Off
HD-W02045WX	45W	110V - 240V (Integral)	Mono Color	8°/10°/15°/45°/60°/80° / 10°*30°/20°*45°/15°*65°/15°*45°	On/Off
HD-W02060WX	60W	110V - 240V (Integral)	Mono Color	8°/10°/15°/45°/60°/80° / 10°*30°/20°*45°/15°*65°/15°*45°	On/Off
HD-W02072WX	72W	110V - 240V (Integral)	Mono Color	8°/10°/15°/45°/60°/80° / 10°*30°/20°*45°/15°*65°/15°*45°	On/Off
HD-W02024R3	24*3W	24V	RGB	20°/30°/60°/80° / 15°*45°	DMX
HD-W02024R4	24*4W	24V	RGBW	20°/30°/60°/80° / 15°*45°	DMX
HD-W02036R3	32*2W	110V - 240V (Integral)	RGB	20°/30°/60°/80° / 15°*45°	DMX
HD-W02024R4	36*2W	110V - 240V (Integral)	RGBW	20°/30°/60°/80° / 15°*45°	DMX