WINDOW
TRICK LIGHT

Window Trick Light : HD-AW0112WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

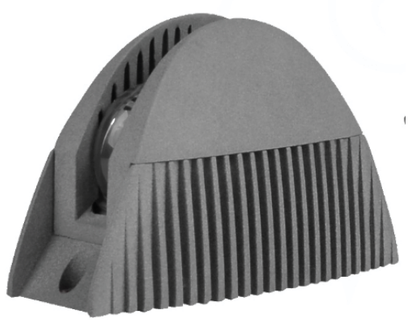

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	152*65*95MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	2*180°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*2W
Controller	Switch
Input voltage	220V -240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0112R4	6*2W	24V	RGBW	2*180°	DMX

Window Trick Light : HD-AW0206WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

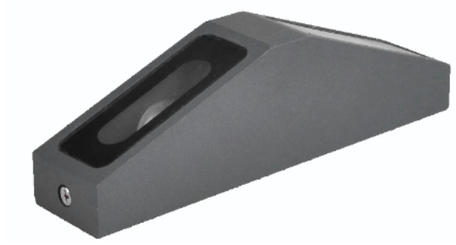

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	185*40*50MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	4*200°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6W
Controller	Switch
Input voltage	110-240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0206R4	6W	24V	RGBW	4*200°	DMX

Window Trick Light : HD-AW0906WX

DMX
HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	74*70MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	2*180°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6W
Controller	Switch | Dali | DMX
Input voltage	220V -240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0906WX	6W	110V - 240V (Integral)	Mono Color	2*180°	On/Off
HD-AW0906R3	6W	24V	RGB	2*180°	DMX

Window Trick Light : HD-AW1006R5

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	D120xH72mm
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	20x180°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	10 W
Controller	Switch | Dali | DMX
Input voltage	220V -240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW1006WX	10W	110V - 240V (Integral)	Mono Color	20*180°	On/Off
HD-AW1006R3	10W	24V	RGB	20*180°	DMX
HD-AW1006R4	10W	24V	RGBW	20*180°	DMX

Window Trick Light : HD-AW0302WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	100*100*400
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	5*140°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	2W
Controller	Switch
Input voltage	110-240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0302R4	2W	24V	RGBW	5*140°	DMX

Window Trick Light : HD-AW0602WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	100*60*75MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	5*180°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	1*2W
Controller	Switch
Input voltage	220V -240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0602R3	1*2W	24V	RGBW	5*180°	DMX

Window Trick Light : HD-AW0409WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	120*70*55MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3*180°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	9W
Controller	Switch
Input voltage	110-240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0409R4	9W	24V	RGBW	3*180°	DMX

Window Trick Light : HD-AW0818WX

HONDEL LIGHTING

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.

IP67 Rating | 5YRS Warranty | RGB | RGBW | DMX | DALI+

PHYSICAL

Body	Die-Cast Aluminium
Dimensions	220*80*48MM
Finish	Powdear Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	4*140°
Color Temp.	Single color
LED Chip	CREE | OSRAM
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*3W
Controller	Switch
Input voltage	220V -240V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-AW0818R4	6*3W	24V	RGBW	4*140°	DMX