


WALL WASHER



PAINT WITH LIGHT

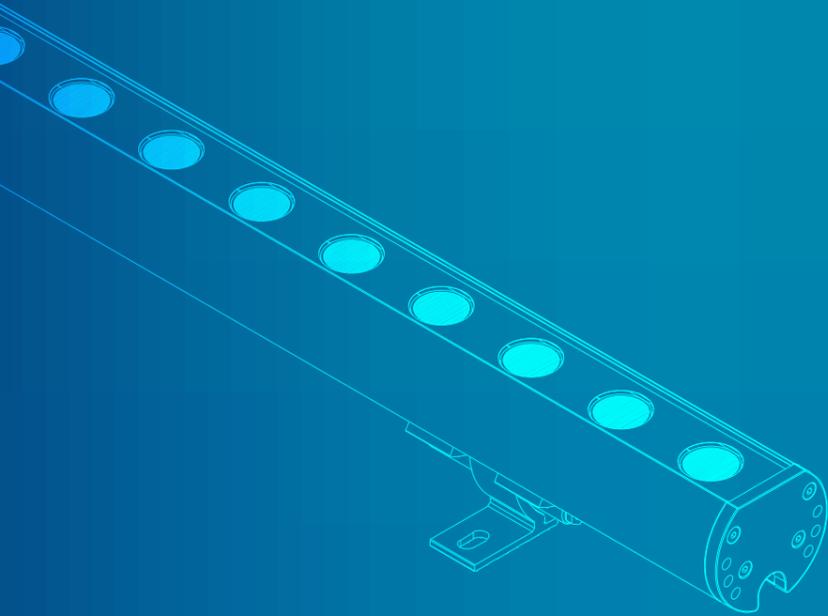

HONDEL
LIGHTING

WALL WASHER

CATALOGUE

CONTENTS

Wall Washer



Page no: 1

Wattage: 24*1W / 36*1W / 24*1W(3in1) / 24*1.5W(4in1) / 24*2W(3in1) / 24*3W(4in1)



Page no: 2

Wattage: 24*1W / 36*1W / 24*2W(3in1) / 24*3W(4in1)



Page no: 5

Wattage: 24*1W / 24*1W / 24*1.5W(3in1) / 24*2W(4in1) / 36*1.5W(12R12G12B)



Page no: 6

Wattage: 36*1W / 24*2W / 36*2W / 24*3W(3in1) / 24*4wW(4in1) / 36*3W(3in1) / 36*4W(4in1) / 36*3W(12R12G12B)



Page no: 7

Wattage: 36W / 36*1.5W / 48W / 24*3w(3in1) / 24*4w(4in1) / 36*3w(3in1) / 36*4w(4in1) / 36*3W(12R12B12G)



Page no: 8

Wattage: 48*2W / 48*2W(3in1) / 48*3wW(4in1) / 72*2W(3in1) / 72*3W(4in1)



Page no: 11

Wattage: 18*2W / 24*2W / 18*3W(3in1) / 18*4W(4in1) / 24*3W(3in1) / 24*4W(4in1)



Page no: 13

Wattage: 6*1w / 6*1w / 6*1w / 6*2w / 6*2w



Page no: 15

Wattage: 30W



Page no: 17

Wattage: 24*1W



Page no: 19

Wattage: 36W/M



Page no: 20

Wattage: 16W



Page no: 21

Wattage: 20W/M




Page no: 22

Wattage: 26W

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	D50*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9



ELECTRICAL

Power	24*1W / 36*1W / 24*1W(3in1) / 24*1.5W(4in1) / 24*2W(3in1) / 24*3W(4in1)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W0524WX	24*1W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0536WX	36*1W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0524R3	24*1W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0524R4	24*1.5W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0548R3	24*2W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0548R4	24*3W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.

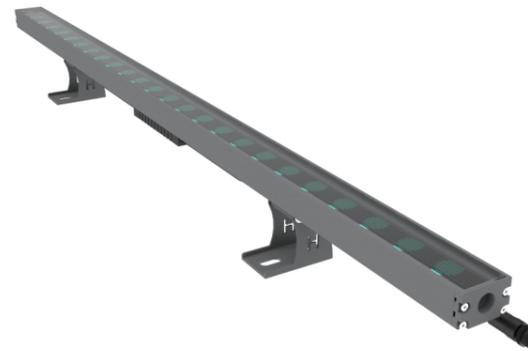

PHYSICAL

Body	Extruded Aluminium
Dimensions	W42*H28*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	8° / 10° / 15° / 45° / 60° / 80° / symmetrical : 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	24*1W / 36*1W / 24*2W(3in1) / 24*3W(4in1)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W07024WX	24*1W	AC220V (Integral)	Mono Color	8° / 10° / 15° / 45° / 60° / 80° / symmetrical : 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W07036WX	36*1W	AC220V (Integral)	Mono Color	8° / 10° / 15° / 45° / 60° / 80° / symmetrical : 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W07048R3	24*2W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / symmetrical : 15°*45°	DMX
HD-W07048R4	24*3W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / symmetrical : 15°*45°	DMX



سوق إكسترا
SOUQ EXTRA

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL


Body	Extruded Aluminium
Dimensions	W42*H30*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	24*1W / 24*1W / 24*1.5W(3in1) / 24*2W(4in1) / 36*1.5W(12R12G12B)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

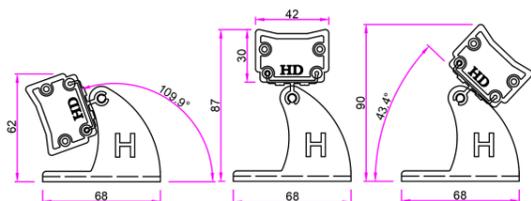

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W0124WX	24*1W	AC220V / DC24V	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0124R3	24*1.5W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0124R4	24*2W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0136RGBD	36*1.5W(12R12G12B)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.




PHYSICAL

Body	Extruded Aluminium
Dimensions	W52*H52*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / CREE3535 / EPISTAR/
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

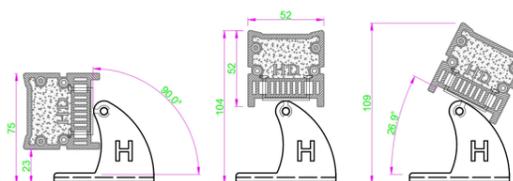

ELECTRICAL

Power	36*1W / 24*2W / 36*2W / 24*3W(3in1) / 24*4wW(4in1) / 36*3W(3in1) / 36*4W(4in1) / 36*3W(12R12G12B)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W0236WX	36*1W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0248WX	24*2W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0272WX	36*2W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0224R3	24*3W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0224R4-D2	24*4wW(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0236R3	36*3W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0236R4	36*4W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0236RGB	36*3W(12R12G12B)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX

LED Wall Washer Light: HD-W0336WX



Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL


Body	Extruded Aluminium
Dimensions	W60*H45*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / CREE3535 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	36W / 36*1.5W / 48W / 24*3w(3in1) / 24*4w(4in1) / 36*3w(3in1) / 36*4w(4in1) / 36*3W(12R12B12G)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W0336WX	36W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0345WX	36*1.5W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0348WX	48W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W0324R3	24*3w(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0324R4	24*4w(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0336R3	36*3w(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0336R4	36*4w(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0336RGB	36*3W(12R12B12G)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX

LED Wall Washer Light: HD-W04048WX



Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL


Body	Extruded Aluminium
Dimensions	W100*H50*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	CREE3535 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	48*2W / 48*2W(3in1) / 48*3wW(4in1) / 72*2W(3in1) / 72*3W(4in1)
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

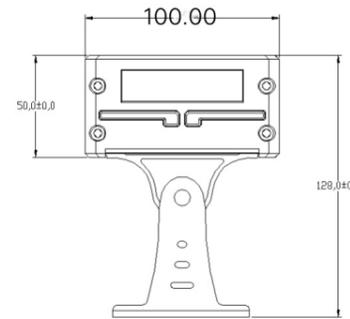

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W04048WX	48*2W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W04048R3	48*2W(3in1)	AC220V (Integral)	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W04048R4	48*3wW(4in1)	AC220V (Integral)	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W04072R3	72*2W(3in1)	AC220V (Integral)	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W0472R4	72*3W(4in1)	AC220V (Integral)	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX



Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL


Body	Extruded Aluminium
Dimensions	W52*H36*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	18*2W / 24*2W / 18*3W(3in1) / 18*4W(4in1) / 24*3W(3in1) / 24*4W(4in1)
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W1918WX	18*2W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W1924WX	24*2W	AC220V (Integral)	Mono Color	3° / 5° / 8° / 10° / 15° / 45° / 60° / 80° / 10°*30° / 20°*45° / 15°*65° / 15°*45°	On/Off
HD-W1918R3	18*3W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W1918R4	18*4W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W1924R3	24*3W(3in1)	DC24V	RGB	20° / 30° / 60° / 80° / 15°*45°	DMX
HD-W1924R4	24*4W(4in1)	DC24V	RGBW	20° / 30° / 60° / 80° / 15°*45°	DMX



Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL


Body	Extruded Aluminium
Dimensions	W42*H75*L166mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL


Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°
Color Temp.	Mono Color, RGB, RGBW
LED Chip	OSRAM/CREE/3030 / EPISTAR
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*1w / 6*1w / 6*1w / 6*2w / 6*2w
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

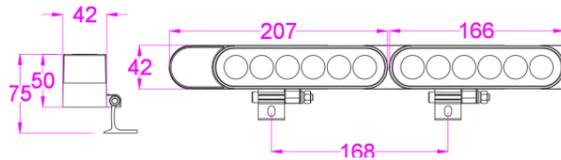

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W2106WX	6*1w	DC24V/AC220V	Mono Color	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°	On/Off
HD-W2106R3	6*1w	DC24V	RGB	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°	DMX
HD-W2106R4	6*1w	DC24V	RGBW	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°	DMX
HD-W2112R3	6*2w	DC24V	RGB	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°	DMX
HD-W2112R3	6*2w	DC24V	RGBW	3° / 5° / 8° / 15° / 80° / symmetrical : 15°/45°	DMX

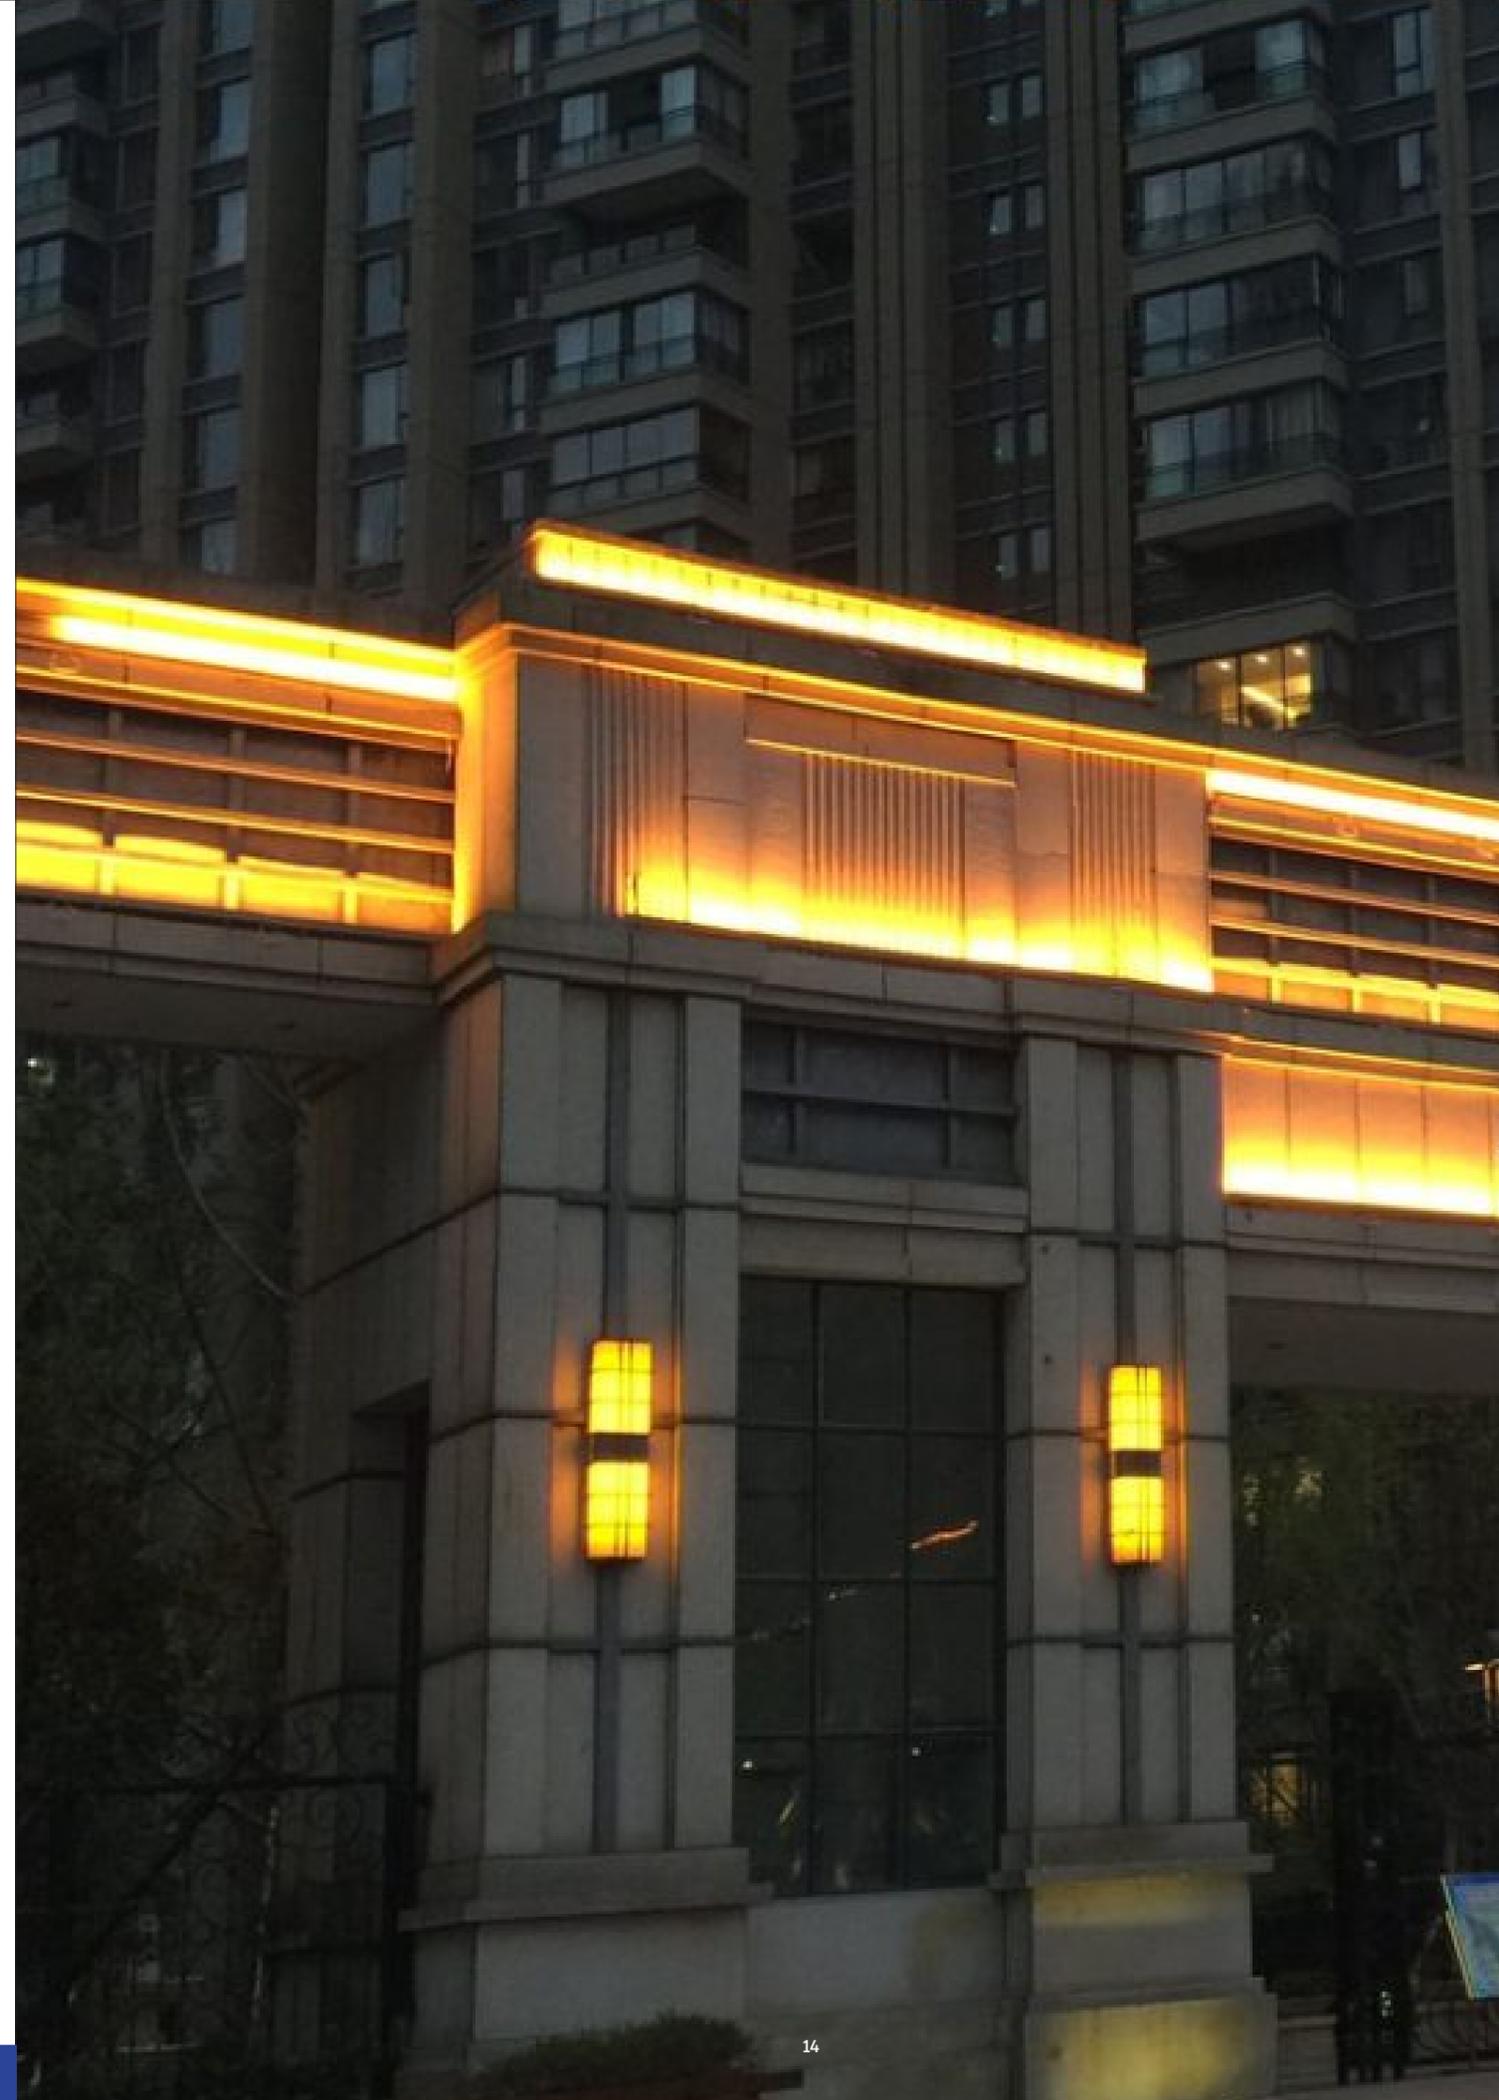

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	W42*H30* L1500MM
Finish	Powder Coating
IP Rating	IP66

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	45°
Color Temp.	Mono Color
LED Chip	
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	30W
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W0130WX	30W	AC220V	Mono Color	45°	On/Off

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	W42*H28*L1000mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	8°/10°/15°/45°/60°/80°/symmetrical : 10°30°/20°45°/15°65°/15°45°
Color Temp.	Mono Color
LED Chip	OSRAM/CREE/3030
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	24*1W
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-W2024WX	24*1W	AC220V (Integral)	Mono Color	8°/10°/15°/45°/60°/80° symmetrical : 10°30°/20°45°/15°65°/15°45°	On/Off

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	L1000*H35*W28MM
Finish	Powder Coating
IP Rating	IP42

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	30°
Color Temp.	Mono Color
LED Chip	
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	36W/M
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-Z01	36W/M	AC220V (Integral)	Mono Color	30°	On/Off

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	L440*H35*W28MM
Finish	Powder Coating
IP Rating	IP42

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	30°
Color Temp.	Mono Color
LED Chip	
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	16W
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-Z01	16W	AC220V (Integral)	Mono Color	30°	On/Off

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	L545*H35*W28MM
Finish	Powder Coating
IP Rating	IP42

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	30°
Color Temp.	Mono Color
LED Chip	
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	20W
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-Z01	20W/M	AC220V (Integral)	Mono Color	30°	On/Off

Product Features

LED wall washer are one of the most popular lighting fixtures for façade lighting projects. They can be used to create a stunning effect on both large and small projects. We offer a wide range of LED wall washer, from 12 to 100 watts, in a variety of color temperatures, including RGB, single color, and tunable white.



PHYSICAL

Body	Extruded Aluminium
Dimensions	L750*H35*W28MM
Finish	Powder Coating
IP Rating	IP42

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	30°
Color Temp.	Mono Color
LED Chip	
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	26W
Controller	Switch Dali DMX
Input voltage	AC220V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-Z01	26W	AC220V (Integral)	Mono Color	30°	On/Off