


WINDOW TRICK LIGHT



LIGHT TRICKS,
BOLD IMPRESSIONS
TRANSFORM WINDOWS INTO WORKS OF ART

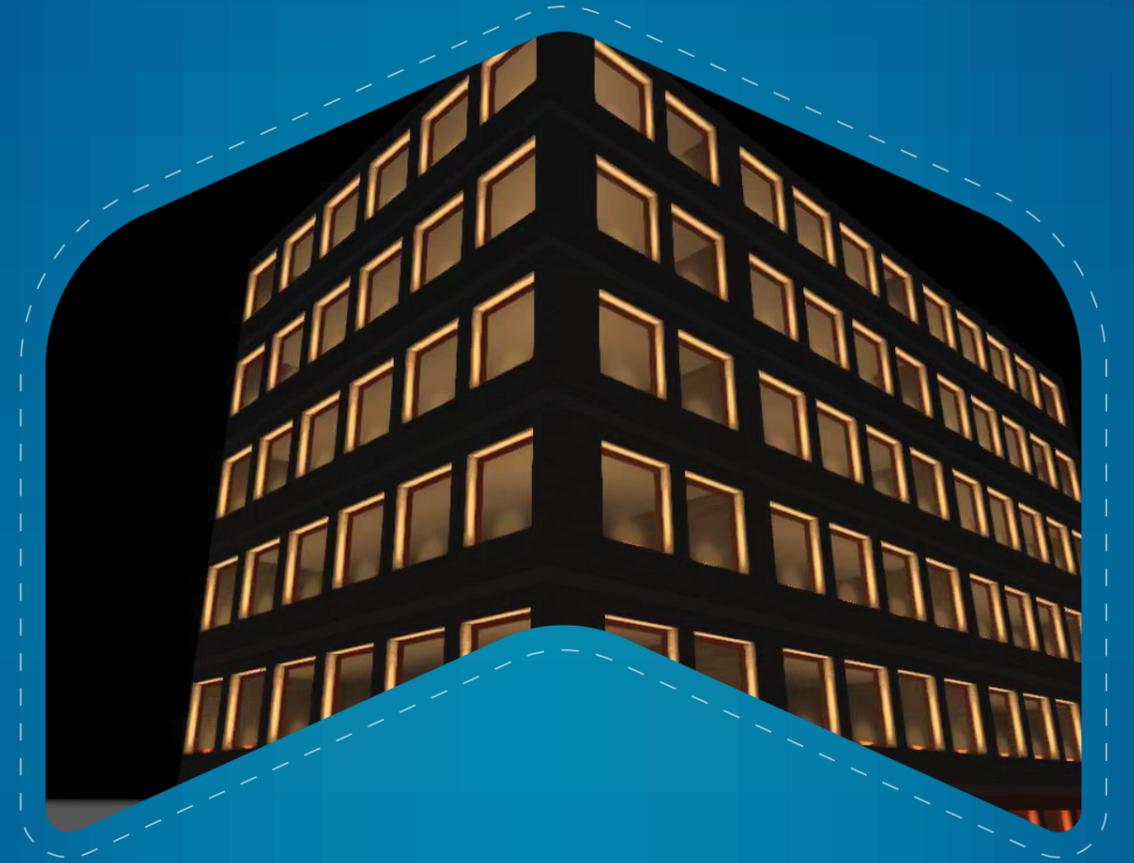

HONDEL
LIGHTING

WINDOW TRICK LIGHT


CATALOGUE

CONTENTS

Window Trick light



Page no: 1
Wattage: 3*2W / 3*3W



Page no: 3
Wattage: 6*2W / 6*3W



Page no: 4
Wattage: 6W / 6W



Page no: 5
Wattage: 9W / 9W



Page no: 6
Wattage: 12*2W / 12*2W




Page no: 7
Wattage: 1*2W / 1*2W



Page no: 9
Wattage: 6*3W / 6*3W



Page no: 10
Wattage: 4*2W / 4*2W



Page no: 11
Wattage: 6*2W / 6*2W

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	120*70*70MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	2*180
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	3*2W / 3*3W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

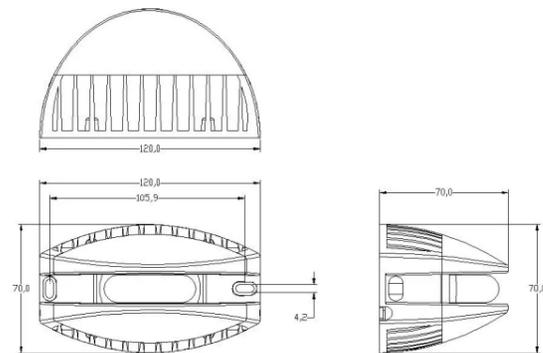

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0103WX	3*2W	AC220V	Mono Color	2*180	On/Off
HD-BA0106R3	3*3W	DC24V	RGB	2*180	DMX



Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL



Body	Die-Cast Aluminium
Dimensions	152*65*95MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	2*180
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*2W / 6*3W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

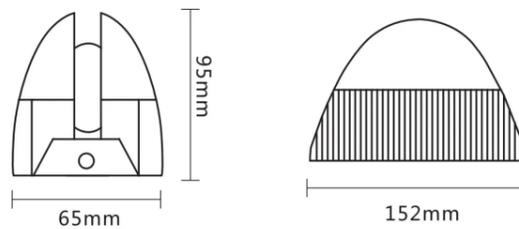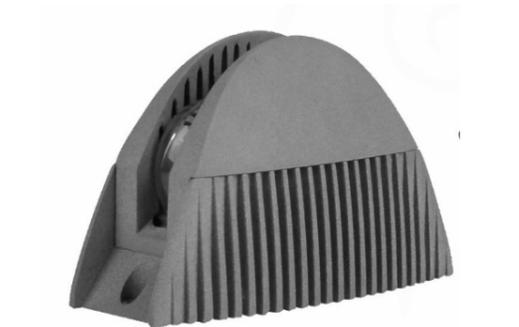

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0106WX	6*2W	AC220V	Mono Color	2*180	On/Off
HD-BA0106R3	6*3W	DC24V	RGB	2*180	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	185*40*50MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	4*200
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6W / 6W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

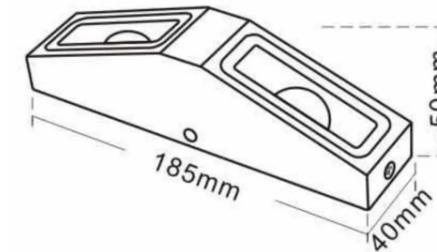

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0204WX	6W	AC220V	Mono Color	4*200	On/Off
HD-BA0204R3	6W	DC24V	RGB	4*200	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	120*70*55MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3*180
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	9W / 9W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

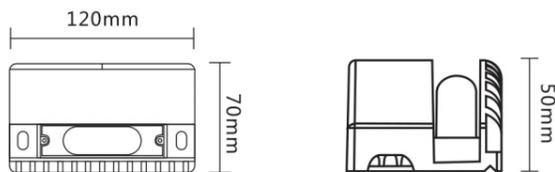

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0303WX	9W	AC220V	Mono Color	3*180	On/Off
HD-BA0303R3	9W	DC24V	RGB	3*180	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	250*90*55MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3*180
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	12*2W / 12*2W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

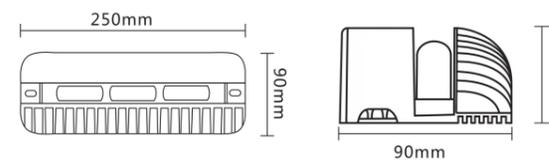

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0409WX	12*2W	AC220V	Mono Color	3*180	On/Off
HD-BA0204R3	12*2W	DC24V	RGB	3*180	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	100*60*75MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	5*180 / 5*90
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	1*2W / 1*2W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

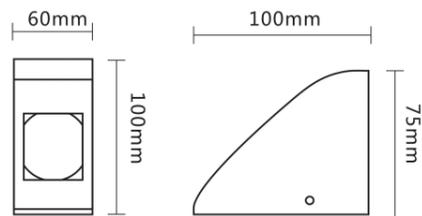

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0501WX	1*2W	AC220V	Mono Color	5*180	On/Off
HD-BA0501R3	1*2W	DC24V	RGB	5*90	DMX



Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL


Body	Die-Cast Aluminium
Dimensions	220*80*48MM
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	4*140
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*3W / 6*3W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

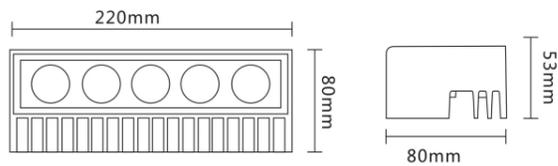

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0605WX	6*3W	AC220V	Mono Color	4*140	On/Off
HD-BA0605R3	6*3W	DC24V	RGB	4*140	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL

Body	Die-Cast Aluminium
Dimensions	90*120*70mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	3*360
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	4*2W / 4*2W
Controller	Switch Dali DMX
Input voltage	AC220V / DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system



Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0704WX	4*2W	AC220V	Mono Color	3*360	On/Off
HD-BA0704R3	4*2W	DC24V	RGB	3*360	DMX

Product Features

Our stunning LED Window Trick Light delivers perfect solutions to light up the window edge. We have a wide range of beam angles and wattage to meet your design requirements. Window trick lights are one of the most suitable lights to light your façade window.



PHYSICAL



Body	Die-Cast Aluminium
Dimensions	288*60*40mm
Finish	Powder Coating
IP Rating	IP67

OPTICAL

Lamp	LED
Cover	Clear Tempered glass
Beam Angle	2*140
Color Temp.	Mono Color, RGB
LED Chip	CREE
Lumen Output	+85lm / W
Color rendering i(Ra):	>82
Power factor (PF):	>0.9

ELECTRICAL

Power	6*2W / 6*2W
Controller	Switch Dali DMX
Input voltage	DC24V
Lamp life	50,000 h
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	-25% ~ +60%
PCB	Excellent heat conductivity aluminum coefficient of heat conductivity ≥ 2.0w/mk
PCB Voltage protection	Reverse voltage protection
PCB Current Stabilization	Integrated current stabilization system

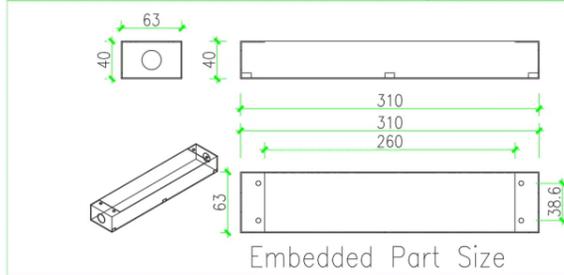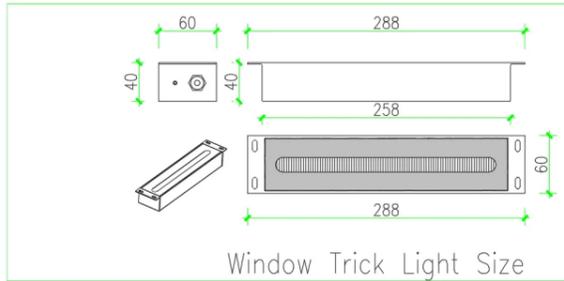

Ref.	Wattage	Voltage	Color Temp	Beam	Control
HD-BA0806WX	6*2W	DC24V	Mono Color	2*140	On/Off
HD-BA0806RX	6*2W	DC24V	RGB	2*140	DMX